



# UNITED STATES AIR FORCE RESEARCH LABORATORY

---

## Summary of Rollover Crash Tests

Louise A. Carter  
Joseph A. Pellettiere

AIR FORCE RESEARCH LABORATORY

Arnold K. Johnson

US DEPARTMENT OF TRANSPORTATION  
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION

Annette Rizer

VERIDIAN  
5200 Springfield Pike  
Dayton OH 45431

June 2002

Final Report for the Period October 1992 to September 1997

20021031 088

*Approved for public release; distribution is unlimited.*

Human Effectiveness Directorate  
Biodynamics and Protection Division  
Biodynamics and Acceleration Branch  
2800 Q Street Bldg 824 Rm 206  
Wright-Patterson AFB OH 45433-7947

## NOTICES

When US Government drawings, specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Please do not request copies of this report from the Air Force Research Laboratory. Additional copies may be purchased from:

National Technical Information Service  
5285 Port Royal Road  
Springfield, Virginia 22161

Federal Government agencies registered with the Defense Technical Information Center should direct requests for copies of this report to:

Defense Technical Information Center  
8725 John J. Kingman Rd., Ste 0944  
Ft. Belvoir VA 22060-6218


## TECHNICAL REVIEW AND APPROVAL

AFRL-HE-WP-TR-2002-0157

This report has been reviewed by the Office of Public Affairs (PA) and is releasable to the National Technical Information Service (NTIS). At NTIS, it will be available to the general public, including foreign nations.

This technical report has been reviewed and is approved for publication.

FOR THE DIRECTOR

  
F. WESLEY BAUMGARDNER, PhD  
Chief, Biodynamics and Protection Division  
Air Force Research Laboratory

| REPORT DOCUMENTATION PAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |             |                         |                               | Form Approved<br>OMB No. 0704-0188                                   |                                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------------------|-------------------------------|----------------------------------------------------------------------|-------------------------------------------------------------|
| The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |             |                         |                               |                                                                      |                                                             |
| <b>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |             |                         |                               |                                                                      |                                                             |
| 1. REPORT DATE (DD-MM-YYYY)<br>June 2002                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |             | 2. REPORT TYPE<br>Final |                               | 3. DATES COVERED (From - To)<br>October 1992 to September 1997       |                                                             |
| 4. TITLE AND SUBTITLE<br>Summary of Rollover Crash Tests                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |             |                         |                               | 5a. CONTRACT NUMBER<br>DTNH22-87-X-07477                             |                                                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |                         |                               | 5b. GRANT NUMBER                                                     |                                                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |                         |                               | 5c. PROGRAM ELEMENT NUMBER<br>62202F                                 |                                                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |                         |                               | 5d. PROJECT NUMBER<br>7184                                           |                                                             |
| 6. AUTHOR(S)<br>Louise A. Carter and Joseph A. Pellettiere (AFRL/HEPA)<br>Arnold K. Johnson (National Highway Traffic Safety Administration)<br>Annette Rizer (Veridian )                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |             |                         |                               | 5e. TASK NUMBER<br>43                                                |                                                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |                         |                               | 5f. WORK UNIT NUMBER<br>20                                           |                                                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |                         |                               |                                                                      |                                                             |
| 7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |             |                         |                               | 8. PERFORMING ORGANIZATION<br>REPORT NUMBER                          |                                                             |
| 9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)<br>Air Force Research Laboratory, Human Effectiveness Directorate<br>Biodynamics and Protection Division<br>Biodynamics and Acceleration Branch<br>Air Force Materiel Command<br>Wright-Patterson AFB OH 45433-7947                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |             |                         |                               | 10. SPONSOR/MONITOR'S ACRONYM(S)<br>AFRL/HEPA                        |                                                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |                         |                               | 11. SPONSOR/MONITOR'S REPORT<br>NUMBER(S)<br>AFRL/HE-WP-TR-2002-0157 |                                                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |                         |                               |                                                                      |                                                             |
| 12. DISTRIBUTION/AVAILABILITY STATEMENT<br>Approved for public release; distribution is unlimited                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |                         |                               |                                                                      |                                                             |
| 13. SUPPLEMENTARY NOTES                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |             |                         |                               |                                                                      |                                                             |
| 14. ABSTRACT<br>Over a period of several years, the National Highway Traffic Safety Administration (NHTSA) has sponsored a total of twenty-four full-scale rollover crash tests (contract # DTNH22-87-X-07477) to investigate vehicle and occupant dynamics during rollover crashes. A variety of pickup trucks, vans and automobiles were tested with a fully instrumented dummy seated in either the driver's or passenger's front seat. For some tests, the dummy was unrestrained and for others the dummy was restrained by the test vehicle's regular belt restraint system. For most of the tests, a specially designed NHTSA Rollover Test Device (RTD) was used to impart to the test vehicle both a linear velocity and a rolling motion about the vehicle's longitudinal axis. In five of the tests the rolling motion was initiated by vehicle impact with a guardrail or curb. Data for all these tests were collected from electrical sensors mounted on the vehicle and the dummy, and from high-speed cameras mounted both inside the vehicle and on the ground. The testing procedures are described along with the modifications to the procedures to improve control and consistency of the rollover. A summary of the general test results is presented, on the vehicle and occupant motions, and the vehicle damage. Finally the lessons learned about this type of testing are presented, along with recommendations for future testing. |             |                         |                               |                                                                      |                                                             |
| 15. SUBJECT TERMS<br>Crash testing, rollover, crashworthiness, impact                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |             |                         |                               |                                                                      |                                                             |
| 16. SECURITY CLASSIFICATION OF:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |                         | 17. LIMITATION OF<br>ABSTRACT |                                                                      | 18. NUMBER<br>OF<br>PAGES                                   |
| a. REPORT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | b. ABSTRACT | c. THIS PAGE            |                               |                                                                      | 19a. NAME OF RESPONSIBLE PERSON<br>Joseph A. Pellettiere    |
| UC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | UC          | UC                      | UL                            |                                                                      | 19b. TELEPHONE NUMBER (Include area code)<br>(937) 255-1150 |

THIS PAGE LEFT BLANK INTENTIONALLY

## SUMMARY

Over a period of several years, The National Highway Traffic Safety Administration (NHTSA) has sponsored a total of twenty-four full-scale rollover crash tests (contract # DTNH22-87-X-07477) to investigate vehicle and occupant dynamics during rollover crashes. A variety of pickup trucks, vans and automobiles were tested with a fully instrumented dummy seated in either the driver's or passenger's front seat. For some tests, the dummy was unrestrained and for others the dummy was restrained by the test vehicle's regular belt restraint system. For most of the tests, a specially designed NHTSA Rollover Test Device (RTD) was used to impart to the test vehicle both a linear velocity and a rolling motion about the vehicle's longitudinal axis. In five of the tests the rolling motion was initiated by vehicle impact with a guardrail or curb. Data for all these tests were collected from electrical sensors mounted on the vehicle and the dummy, and from high-speed cameras mounted both inside the vehicle and on the ground. The testing procedures are described along with the modifications to the procedures to improve control and consistency of the rollover. A summary of the general test results is presented, on the vehicle and occupant motions, and the vehicle damage. Finally the lessons learned about this type of testing are presented, along with recommendations for future testing.

THIS PAGE LEFT BLANK INTENTIONALLY

## TABLE OF CONTENTS

|                               |    |
|-------------------------------|----|
| INTRODUCTION .....            | 1  |
| TEST CONFIGURATIONS .....     | 3  |
| INSTRUMENTATION.....          | 9  |
| PHOTOGRAPHY .....             | 11 |
| VEHICLE MASS PROPERTIES ..... | 12 |
| TEST RESULTS.....             | 13 |
| VEHICLE RESPONSE.....         | 13 |
| OCCUPANT RESPONSE.....        | 21 |
| CONCLUSIONS .....             | 26 |
| REFERENCES .....              | 28 |
| APPENDIX A .....              | 29 |

## LIST OF FIGURES

|                                                                   |    |
|-------------------------------------------------------------------|----|
| Figure 1 - Test Vehicle Mounted on the Rollover Test Device ..... | 4  |
| Figure 2 - RTD Test Layout .....                                  | 4  |
| Figure 3 - Ford Bronco Mounted on RTD With -45° Yaw.....          | 5  |
| Figure 4 - Guardrail Construction .....                           | 6  |
| Figure 5 - Guardrail Impact Test Layout.....                      | 6  |
| Figure 6 - Pole Impact Test .....                                 | 7  |
| Figure 7 - Pole Load Cell Locations.....                          | 9  |
| Figure 8 - Pole Impact Test Layout .....                          | 11 |
| Figure 9 - Test D8 Dodge Caravan Damage .....                     | 16 |
| Figure 10 - Dodge Caravan Pole Impact Test Final Position .....   | 18 |
| Figure 11 - Nissan Pickup Pole Impact Test Final Position.....    | 18 |



## LIST OF TABLES

|           |                                                      |    |
|-----------|------------------------------------------------------|----|
| Table 1   | - Rollover Tests .....                               | 2  |
| Table 2   | - Rollover Test Conditions .....                     | 8  |
| Table 3   | - Vehicle Instrumentation .....                      | 10 |
| Table 4   | - Dummy Instrumentation .....                        | 10 |
| Table 5   | - Vehicle Mass Properties Before Testing.....        | 12 |
| Table 6   | - Vehicle Mass Properties After Testing.....         | 13 |
| Table 7   | - Vehicle Motion and Damage .....                    | 15 |
| Table 8   | - Maximum Pole Loads .....                           | 19 |
| Table 9   | - Vehicle Accelerations and Angular Velocities ..... | 20 |
| Table 10  | - Occupant Contacts .....                            | 22 |
| Table 11  | - Occupant Head & Chest Accelerations.....           | 24 |
| Table 12  | - Neck Loads .....                                   | 25 |
| Table 13  | - HIC Values For Test D15 .....                      | 30 |
| Table 14  | - HIC Values Using Filtering Methods .....           | 31 |
| Table A-1 | - HIC Values For Test D15.....                       | 30 |
| Table A-2 | - HIC Values Using Filtering Methods.....            | 31 |

**THIS PAGE LEFT BLANK INTENTIONALLY**

## INTRODUCTION

Rollover accidents are receiving increasing attention in the field of automobile safety by the National Highway Traffic Safety Administration (NHTSA). There were more than 9,600 rollover fatalities in passenger cars, pickup trucks, passenger vans, and utility vehicles in 1989. Of these fatalities, thirty-eight percent were not ejected, with most being killed by impact with the interior of the vehicle. Of special concern are small pickup trucks and light vans, because of the high frequency of their involvement in rollover crashes. Over several years a number of full-scale rollover tests have been sponsored by NHTSA to investigate vehicle and occupant dynamics during rollover events. The tests were also set up to provide data for predictive computer simulations of both the vehicle and occupant motions. References <sup>1</sup>, <sup>2</sup> and <sup>3</sup> provide results of such simulations. Table 1 contains a list of the full-scale tests conducted. All of the tests were conducted at Transportation Research Center of Ohio (TRC), except for the first test in 1983 which was conducted at Southwest Research Institute (SWRI). For each test the NHTSA data tape number is given with the type of test and its date. Except for the Dodge Aries test on 3 November 1983, all the tests have the test date as the test number which appears in the films and pictures of the tests. This report contains a general summary of the testing procedures and results for all these rollover tests. In nineteen of the tests a Rollover Test Device (RTD)<sup>4</sup> was used to initiate the rolling motion. The remaining tests consisted of three guardrail and two pole impact tests. Most of the vehicles were small pickup trucks and light vans. These vehicles were chosen because of the high frequency in which they are involved in rollover accidents. The particular vehicles used were chosen based on availability, previous testing experience with the vehicle, and other testing considerations.

**Table 1. Rollover Tests**

| Test # | Vehicle                            | Test Type | Data Tape # | Date     |
|--------|------------------------------------|-----------|-------------|----------|
| G1     | 1981 Dodge Aries 4-Door            | Guardrail | a           | 11-03-83 |
| D1     | 1975 Ford Pinto                    | RTD       | a           | 01-08-85 |
| D2     | 1981 Plymouth Reliant K            | RTD       | V1546       | 05-23-85 |
| D3     | 1984 Honda Accord                  | RTD       | V878        | 11-13-85 |
| D4     | 1982 Chevrolet Celebrity           | RTD       | V888        | 01-10-86 |
| D5     | 1979 Dodge Omni Hatchback          | RTD       | V920        | 03-21-86 |
| D6     | 1982 Mercury Zephyr                | RTD       | V939        | 05-05-86 |
| D7     | 1988 Nissan Standard Pickup        | RTD       | V1274       | 06-30-88 |
| D8     | 1988 Dodge Caravan                 | RTD       | V1266       | 07-14-88 |
| D9     | 1988 Chevrolet Standard Bed Pickup | RTD       | V1267       | 08-17-88 |
| D10    | 1988 Ford Bronco                   | RTD       | V1255       | 09-23-88 |
| D11    | 1989 Nissan Standard Pickup        | RTD       | V1289       | 05-30-89 |
| D12    | 1989 Dodge Colt Hatchback          | RTD       | V1471       | 09-18-89 |
| D13    | 1989 Dodge Caravan                 | RTD       | V1391       | 10-25-89 |
| D14    | 1989 Ford Bronco II                | RTD       | V1392       | 11-13-89 |
| D15    | 1989 Nissan Standard Pickup        | RTD       | V1393       | 11-16-89 |
| D16    | 1989 Nissan Standard Pickup        | RTD       | V1394       | 11-22-89 |
| D17    | 1989 Pontiac Grand Am              | RTD       | V1395       | 11-29-89 |
| P1     | 1988 Dodge Caravan                 | Pole      | V1516       | 08-20-90 |
| D18    | 1988 Dodge Ram Pickup              | RTD       | V1521       | 08-27-90 |
| D19    | 1988 Ford Ranger Pickup            | RTD       | V1520       | 09-05-90 |
| G2     | 1988 Nissan Standard Pickup        | Guardrail | V1531       | 09-10-90 |
| P2     | 1988 Nissan Standard Pickup        | Pole      | V1522       | 09-14-90 |
| G3     | 1988 Dodge Caravan                 | Guardrail | V1530       | 10-10-90 |

a. Data tapes are not available for these tests. However, the test report and the high-speed films are available from the NHTSA.

## TEST CONFIGURATIONS

The vehicles in the RTD tests were mounted on the RTD, as shown in Figure 1, with an initial roll angle of 30 degrees. The RTD was towed by cable along a guide-rail to obtain a specified initial velocity. After reaching the start point, the launch sequence was started. First, chains attaching the vehicle to the platform were released, the pneumatic cylinders were actuated producing angular rotation of the platform and vehicle, and the RTD was decelerated. This resulted in the vehicle being thrown clear of the RTD with an initial linear and angular velocity. The vehicle was mounted with its frame directly supported on the platform to avoid effects from the tires and suspension system, providing better repeatability between tests. The RTD wheels were designed so that they can be rotated to allow the RTD and the test vehicle to be crabbed at an initial yaw angle (Figure 2). This feature of the RTD permits its use over a wide range of rollover crashes. Figure 3 shows the 1988 Ford Bronco from test D10 mounted on the RTD with  $-45^\circ$  yaw. In the initial ten RTD tests on a concrete surface, many of the vehicles did not complete a full roll. Since accident investigation data show that the greater amount of roll, the greater potential for injury, a rubber mat was installed on the surface in order to increase friction and therefore increase the likelihood of multiple rolls, as well as to standardize the properties of the initial impacting surface. The RTD was originally designed to handle small to mid-sized automobiles. For the RTD to handle test vehicles of greater weight and to provide greater angular velocity, the original pneumatic cylinders were replaced with larger cylinders after the sixth RTD test. Also, throughout the testing process a number of modifications were made to the RTD pneumatic and electrical systems to increase the angular acceleration imparted to the vehicle<sup>5</sup>. The RTD structure was also upgraded to improve stability, including larger axles and wheels which were used in the last two RTD tests. These additional modifications improved the RTD's operation and increased the test vehicle's angular velocity at release.

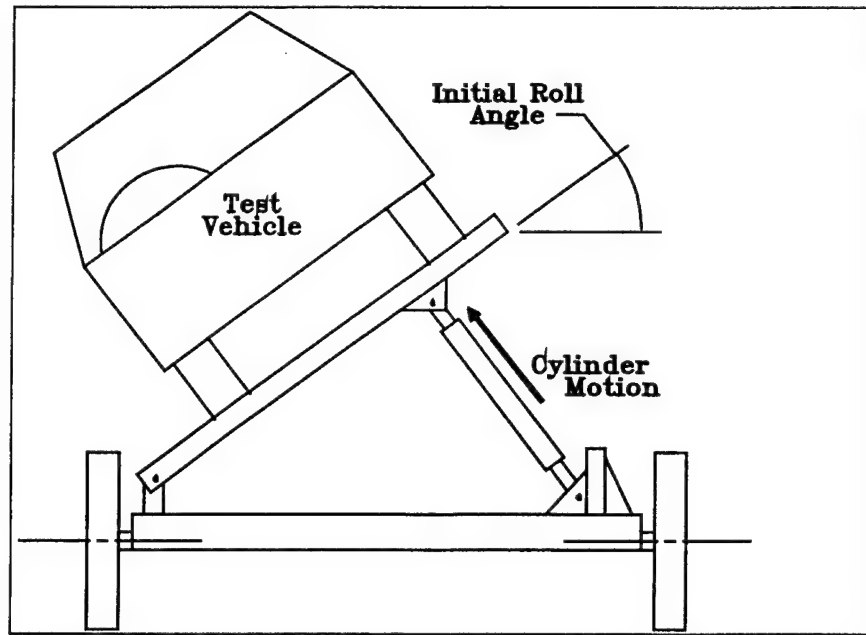


Figure1. Test Vehicle Mounted on the Rollover Test Device


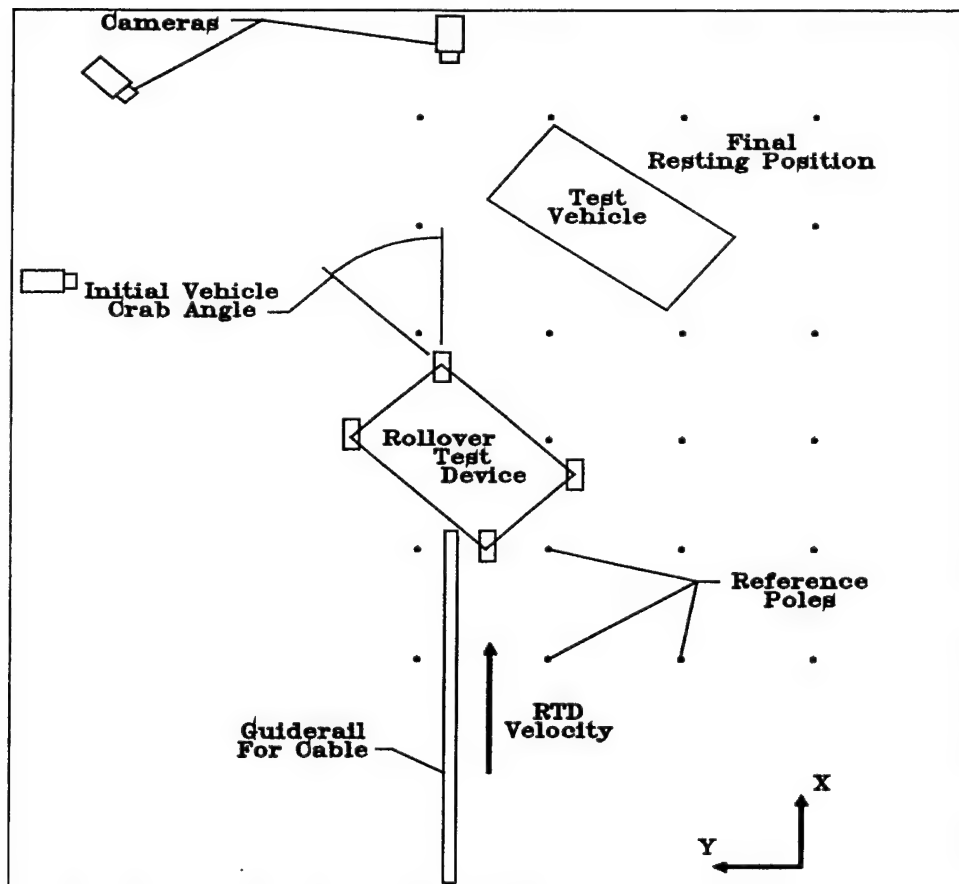


Figure 2. RTD Test Layout

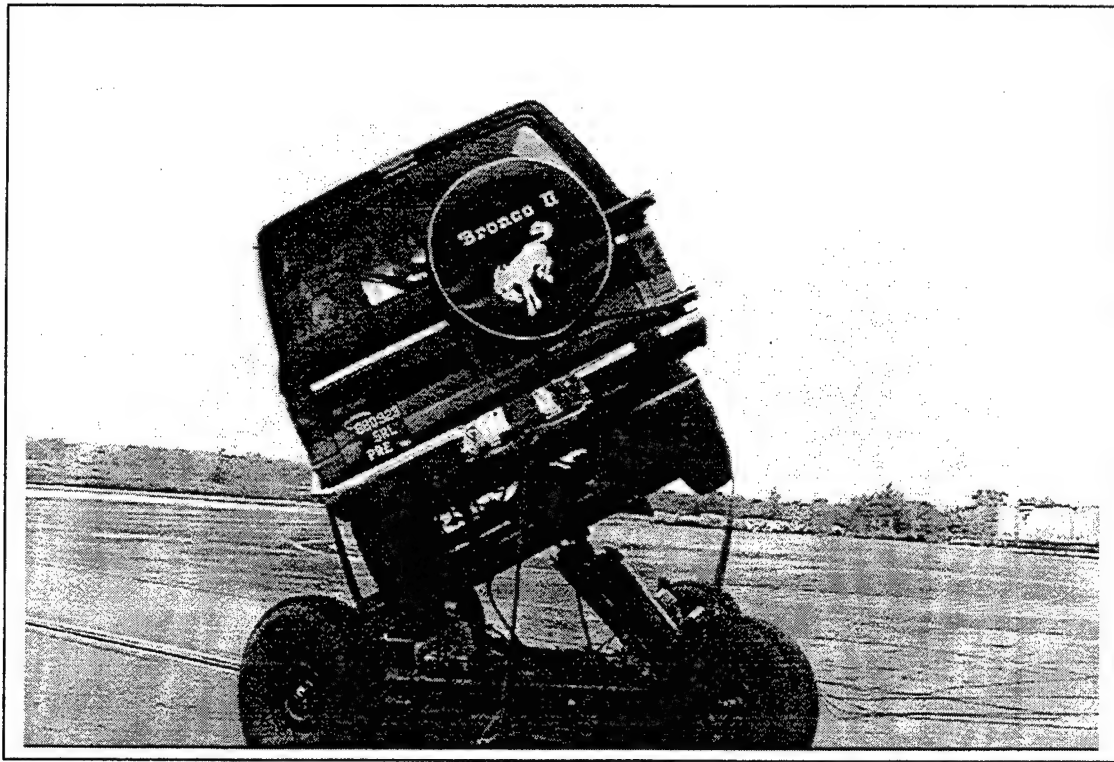

**Figure 3.** Ford Bronco Mounted on RTD With -45° Yaw

In the guardrail impact tests, the vehicle was towed by cable about a pulley to obtain the specified initial velocity. A stationary cable was used to control any lateral movement of the vehicle. Several feet in front of the guardrail, the vehicle was released from the towing cable and allowed to run up the turned down end of the guardrail (Figure 4). The guardrail was positioned to be 15 inches offset from the vehicle centerline on the driver's side. The guardrail forced the vehicle upward and induced a rolling moment. A grass surface surrounded the guardrail. The complete test layout for the G2 and G3 guardrail impact tests is depicted in Figure 5. A similar test layout was used for the G1 guardrail impact test which had a dirt and grass test area.

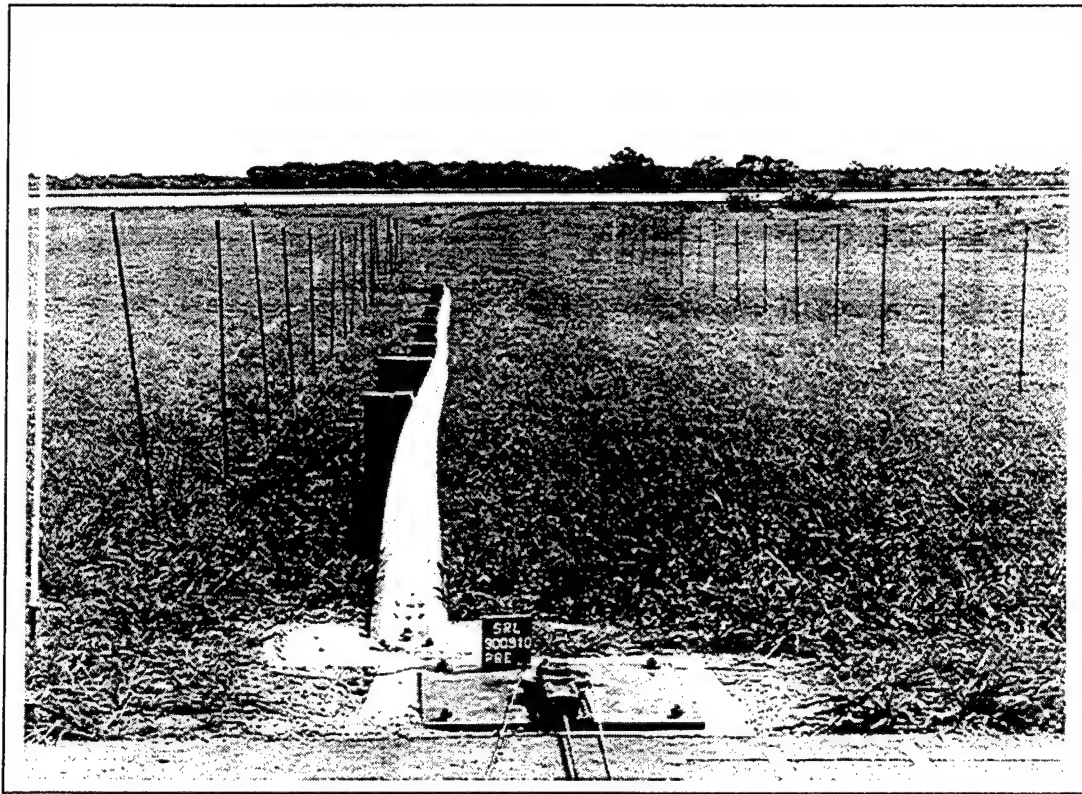


Figure 4. Guardrail Construction


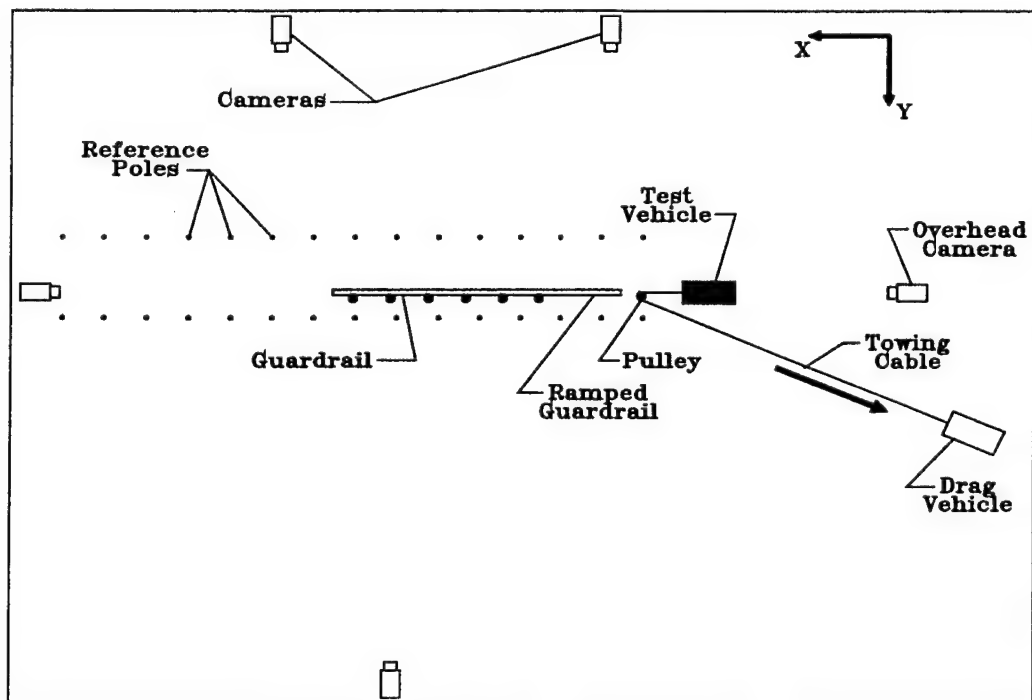


Figure 5. Guardrail Impact Test Layout



In the pole impact tests, the vehicle was towed laterally by cable on an asphalt surface to obtain the specified initial velocity. The surface was soaped to allow the vehicle's wheels to slide without the vehicle becoming unstable. Immediately prior to impact, the vehicle was released from the cable. The initial impact was between the driver's side wheels and two eight-inch-high steel plate curbs. As shown in Figure 6, the curbs were positioned to initiate the vehicle's roll. A 12-inch diameter instrumented steel pole was positioned 75.5 inches beyond the curbs. The pole was placed approximately aligned with the vehicle's longitudinal center of mass and at a distance from the curbs that would cause the vehicle to impact the pole during its rolling motion.

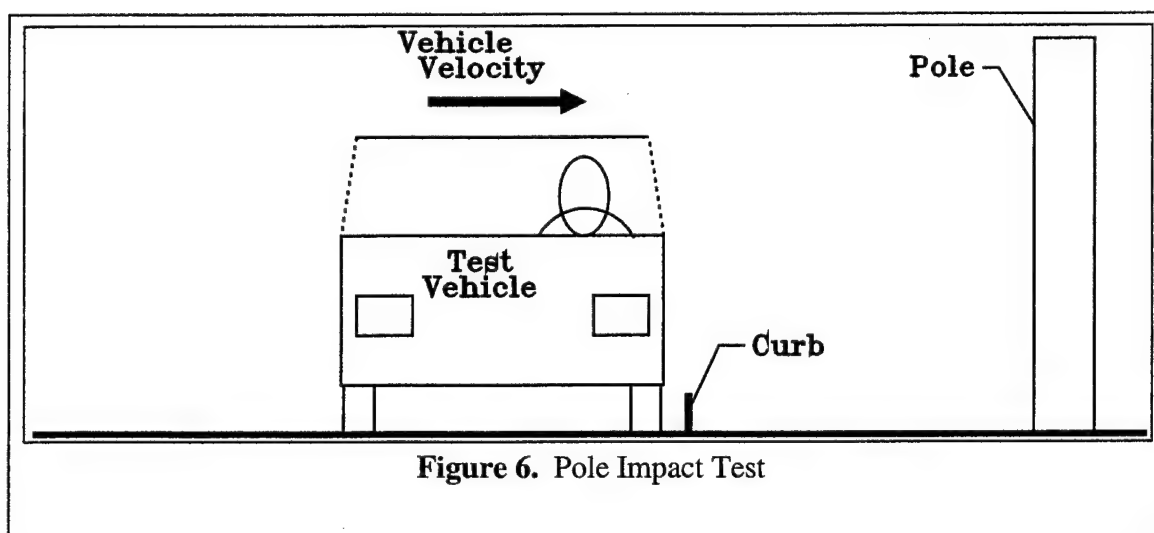

The specific test conditions for each test are listed in Table 2. In most of the tests, a Hybrid III dummy was placed in the driver's seat and restrained by a three-point seat belt. The first impact side refers to which side of the vehicle struck the ground initially.

**Table 2. Rollover Test Conditions**

| Test # | Vehicle          | Vehicle Crab Angle (deg) | First Impact Side | Speed (mph) <sup>a</sup> | Surface      | Dummy Position | Restraint        |
|--------|------------------|--------------------------|-------------------|--------------------------|--------------|----------------|------------------|
| D1     | Ford Pinto       | -45                      | Left              | 17                       | Concrete     | Driver         | 3-Point ?        |
| D2     | Plymouth Reliant | -45                      | Left              | 21                       | Concrete     | Driver         | 3-Point Friction |
| D3     | Honda Accord     | -45                      | Left              | 21                       | Concrete     | Driver         | None             |
| D4     | Chevy Celebrity  | -45                      | Left              | 23                       | Concrete     | Driver         | None             |
| D5     | Dodge Omni       | -45                      | Left              | 23                       | Concrete     | Passenger      | None             |
| D6     | Mercury Zephyr   | -60                      | Left              | 23                       | Concrete     | Passenger      | None             |
| D7     | Nissan Pickup    | -45                      | Left              | 30                       | Concrete     | Driver         | 3-Point D-Ring   |
| D8     | Dodge Caravan    | -45                      | Left              | 30                       | Concrete     | Passenger      | 3-Point Friction |
| D9     | Chevy Pickup     | -45                      | Left              | 30                       | Concrete     | Passenger      | None             |
| D10    | Ford Bronco      | -45                      | Left              | 30                       | Concrete     | Driver         | None             |
| D11    | Nissan Pickup    | -45                      | Left              | 30                       | Mat          | Driver         | 3-Point D-Ring   |
| D12    | Dodge Colt       | 0                        | Right             | 30                       | Mat          | Driver         | None             |
| D13    | Dodge Caravan    | 45                       | Right             | 30                       | Mat          | Passenger      | 3-Point D-Ring   |
| D14    | Ford Bronco      | 90                       | Right             | 30                       | Mat          | Driver         | 3-Point Friction |
| D15    | Nissan Pickup    | 90                       | Right             | 30                       | Mat          | Driver         | 3-Point D-Ring   |
| D16    | Nissan Pickup    | 90                       | Right             | 30                       | Mat          | Driver         | 3-Point D-Ring   |
| D17    | Pontiac Grand Am | 90                       | Right             | b                        | Mat          | Driver         | 3-Point, 2 belts |
| D18    | Dodge Ram        | 90                       | Right             | 30                       | Mat          | Driver         | 3-Point ?        |
| D19    | Ford Ranger      | 90                       | Right             | 30                       | Mat          | Driver         | 3-Point Friction |
| G1     | Dodge Aries      | 0                        | Right             | 60.3                     | Dirt & Grass | Passenger      | 3-Point Friction |
| G2     | Nissan Pickup    | 0                        | Right             | 58.4                     | Grass        | Driver         | 3-Point D-Ring   |
| G3     | Dodge Caravan    | 0                        | Right             | 50.5                     | Grass        | Driver         | 3-Point Friction |
| P1     | Dodge Caravan    | -90                      | Left              | 30                       | Concrete     | Driver         | 3-Point Friction |
| P2     | Nissan Pickup    | -90                      | Left              | 30                       | Concrete     | Driver         | 3-Point D-Ring   |

a. For the RTD test, speed refers to the speed of the RTD.

b. Rollover Test Device failure. Data unavailable.

### Instrumentation

When used, the RTD was instrumented to collect the three-dimensional acceleration of the RTD and the platform displacement at each cylinder. Also, limit switches were used on both sides of the vehicle to measure the vehicle/RTD separation times. The pole in the pole impact tests was instrumented to measure the forces acting on it. Figure 7 shows the location of the four pole load cells. All the vehicles were instrumented to collect the three-dimensional vehicle center of mass accelerations and angular velocities. Also collected were the suspension displacements at all four wheels. The locations and coordinate systems for the vehicle instrumentation are listed in Table 3. Part 572 (Hybrid II) dummies were used in the first three tests and Part 572E (Hybrid III) dummies were used in the subsequent tests. The dummies were instrumented to collect three-dimensional head, chest and pelvis accelerations, three-dimensional neck forces and moments, and chest displacement. Femur loads were also measured in some of the earlier tests. The locations and coordinate systems for the dummy instrumentation are listed in Table 4. When the dummy was restrained, the belt displacement at the belt feed-out point was also measured. A description of the data filtering used for these tests is included in Appendix A.

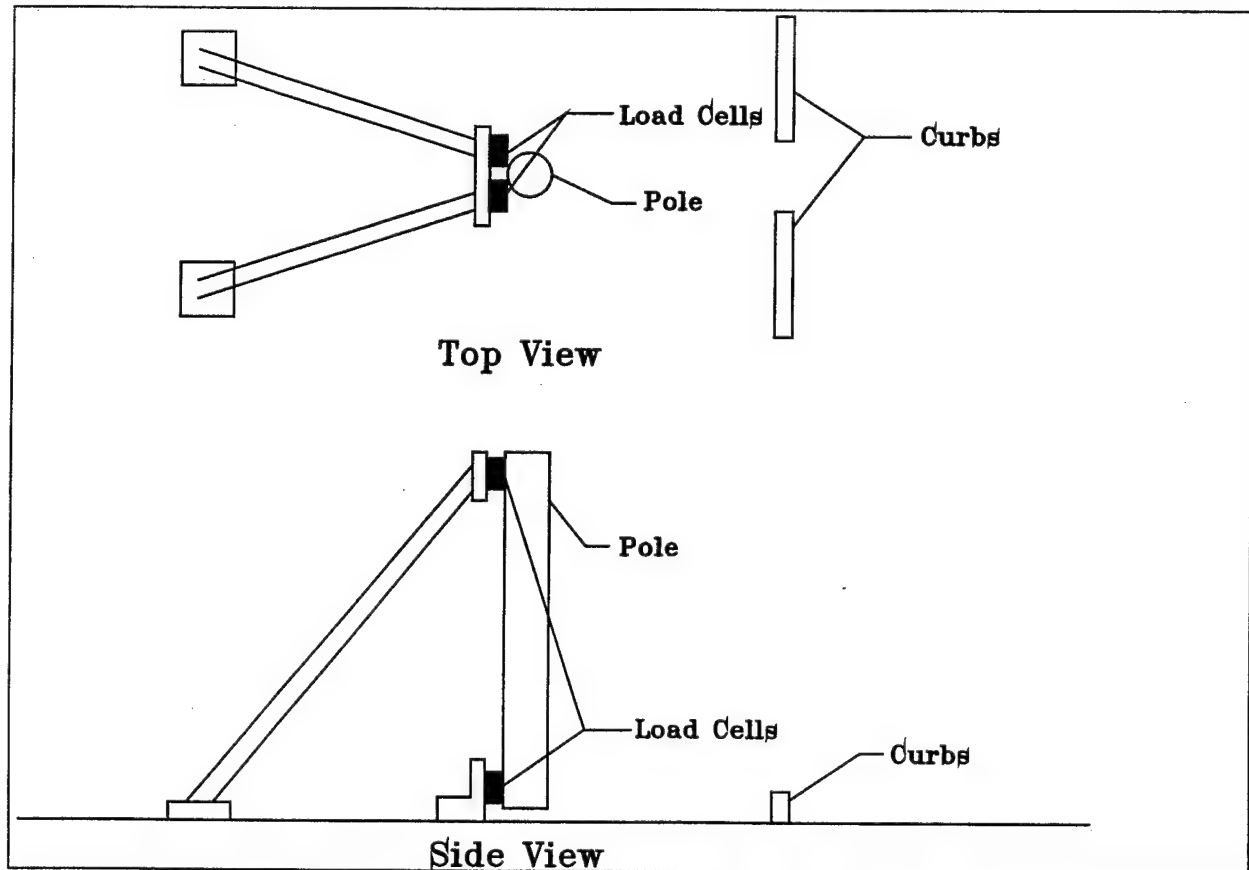


Figure 7. Pole Load Cell Locations

**Table 3. Vehicle Instrumentation**

---

Vehicle Accelerometer

Located near vehicle center of gravity

X: + forward

Y: + leftward

Z: + upward

Vehicle Angular Rate Gyro

Located near vehicle center of gravity

Roll : + to right when facing forward

Pitch: + front downward

Yaw : + Counterclockwise when facing forward

Suspension Potentiometer

Located at axle close to wheel

Displacement: + outward

Belt Potentiometer

Located close to payout point

Displacement: + outward

---

**Table 4. Dummy Instrumentation**

---

Head, Chest, and Pelvis Accelerometers

Longitudinal X: + forward

Lateral Y: + leftward

Vertical Z: + upward

Neck Load Cells

Forces

Longitudinal X: + head forward

Lateral Y: + head rightward

Vertical Z: + head upward, neck tension

Moments

About longitudinal X: + right ear to right shoulder

About lateral Y: + head rotating forward

About vertical Z: + head rotating leftward

Chest Potentiometer

Longitudinal displacement: + outward

Femur Load Cell

Axial force: + tension

---

### Photography

High speed cameras were used to film both the vehicle and dummy motion. Typically, three exterior cameras were used in the RTD tests as shown in Figure 2 to film the vehicle motion. Four exterior cameras were used in the pole impact tests, including an overhead camera not shown in Figure 8, and five cameras were used in the guardrail impact tests (Figure 5). A panning camera was also used to provide a real-time film of the vehicle motion. Whenever possible, two interior cameras were used to film the dummy motion. The front interior camera was mounted laterally opposite to the dummy in a position unlikely to affect the dummy's motion. Usually this camera was mounted to the floor, in front of the seat and focusing up towards the dummy. The second interior camera was mounted in the back seat or compartment with the field of view covering the whole front seat compartment in case the dummy moved laterally across the vehicle. This camera was not used in the tests using pickup trucks, due to the lack of a safe mounting position. Break-away reference poles were placed throughout the test areas to provide a gauge for measuring the vehicle motion from the films.

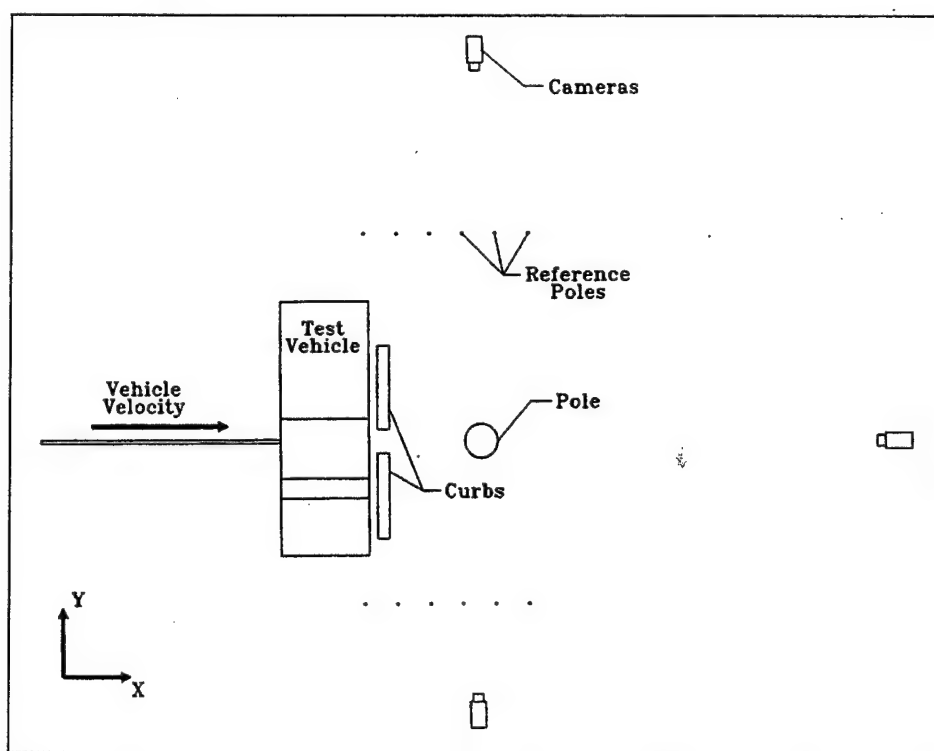


Figure 8. Pole Impact Test Layout

### Vehicle Mass Properties

The motion of a vehicle during a rollover is affected by the mass properties of a vehicle. To study the effects of these properties, the weight, center of mass location, and moments of inertia of each test vehicle in the last seventeen tests were measured. These measurements were made with the vehicle fully instrumented as it was in the test. The mass properties were measured both before and after the test to determine how the vehicle damage affects the mass properties. Table 5 contains these mass properties for the vehicles before testing and Table 6 contains the properties after testing. The coordinate system used for the vehicle measurements is defined as positive X pointing forward, positive Y pointing left, and positive Z pointing up.

**Table 5. Vehicle Mass Properties Before Testing**

| Test # | Vehicle          | Weight<br>(lb) | Center of Mass (in) |                |                | Moments of Inertia (ft-lb-s <sup>2</sup> ) |        |        |
|--------|------------------|----------------|---------------------|----------------|----------------|--------------------------------------------|--------|--------|
|        |                  |                | X <sup>a</sup>      | Y <sup>b</sup> | Z <sup>c</sup> | X                                          | Y      | Z      |
| D7     | Nissan Pickup    | 3140           | 50.8                | -0.8           | 23.6           | 335.9                                      | 1706.0 | 1812.0 |
| D8     | Dodge Caravan    | 3424           | 47.9                | 0.6            | 25.8           | 514.5                                      | 2160.0 | 2288.7 |
| D9     | Chevy Pickup     | 4087           | 53.5                | -0.4           | 27.6           | 513.7                                      | 2615.4 | 2782.5 |
| D10    | Ford Bronco      | 3810           | 48.9                | -0.4           | 28.6           | 424.6                                      | 1965.2 | 1928.0 |
| D11    | Nissan Pickup    | 3156           | 52.0                | -0.1           | 23.0           | 336.3                                      | 1963.4 | 1986.1 |
| D12    | Dodge Colt       | 2422           | 39.5                | -0.4           | 20.3           | 281.2                                      | 1209.2 | 1239.5 |
| D13    | Dodge Caravan    | 3512           | 48.5                | -0.6           | 24.9           | 603.4                                      | 2426.4 | 2420.4 |
| D14    | Ford Bronco      | 3927           | 51.8                | 0.1            | 28.9           | 414.1                                      | 2056.2 | 1965.3 |
| D15    | Nissan Pickup    | 3110           | 51.6                | 0.0            | 23.6           | 381.0                                      | 2058.7 | 1913.8 |
| D16    | Nissan Pickup    | 3173           | 51.9                | -0.2           | 23.8           | 363.4                                      | 1887.1 | 1880.5 |
| D17    | Pontiac Grand Am | 2836           | 41.7                | -1.0           | 21.6           | 321.9                                      | 1645.8 | 1664.7 |
| D18    | Dodge Ram        | 3109           | 53.0                | -0.6           | 21.6           | 328.5                                      | 1933.7 | 2004.7 |
| D19    | Ford Ranger      | 3084           | 51.0                | -0.2           | 24.5           | 322.0                                      | 1872.3 | 1971.0 |
| G2     | Nissan Pickup    | 3091           | 50.8                | -0.2           | 22.8           | 335.2                                      | 1808.5 | 1922.4 |
| G3     | Dodge Caravan    | 3691           | 49.3                | -1.2           | 24.8           | 568.3                                      | 2483.7 | 2548.5 |
| P1     | Dodge Caravan    | 3614           | 49.1                | 0.2            | 24.7           | 552.0                                      | 2511.6 | 2569.1 |
| P2     | Nissan Pickup    | 3164           | 51.2                | -0.7           | 22.7           | 354.7                                      | 1896.7 | 2007.6 |

a. Distance from front axle. b. Distance from center line. c. Center of mass height, measured from the ground.

**Table 6. Vehicle Mass Properties After Testing**

| Test # | Vehicle          | Weight<br>(lb) | Center of Mass (in) |                |                | Moments of Inertia (ft-lb-s <sup>2</sup> ) |        |        |
|--------|------------------|----------------|---------------------|----------------|----------------|--------------------------------------------|--------|--------|
|        |                  |                | X <sup>a</sup>      | Y <sup>b</sup> | Z <sup>c</sup> | X                                          | Y      | Z      |
| D7     | Nissan Pickup    | 3070           | 51.6                | -1.8           | 22.9           | 323.1                                      | 1671.9 | 1743.3 |
| D8     | Dodge Caravan    | 3341           | 48.6                | 0.7            | 25.6           | 541.7                                      | 2132.0 | 2183.9 |
| D9     | Chevy Pickup     | 4092           | 53.0                | -0.5           | 26.6           | 538.8                                      | 2648.8 | 2678.8 |
| D10    | Ford Bronco      | 3712           | 48.5                | -0.2           | 28.0           | 422.3                                      | 1913.8 | 1860.2 |
| D11    | Nissan Pickup    | 3124           | 53.5                | 0.0            | 22.6           | 328.8                                      | 1891.0 | 1901.3 |
| D12    | Dodge Colt       | 2369           | 39.7                | -0.7           | 20.1           | 258.8                                      | 1168.5 | 1285.5 |
| D13    | Dodge Caravan    | 3466           | 49.3                | -1.2           | 24.5           | 528.7                                      | 2338.8 | 2284.7 |
| D14    | Ford Bronco      | 3838           | 52.0                | 2.8            | 26.5           | 403.1                                      | 1923.5 | 1934.5 |
| D15    | Nissan Pickup    | 3053           | 51.3                | 0.1            | 22.5           | 329.3                                      | 1848.2 | 1814.8 |
| D16    | Nissan Pickup    | 3110           | 50.9                | 0.6            | 21.6           | 325.6                                      | 1790.2 | 1844.3 |
| D17    | Pontiac Grand Am | 2829           | 41.5                | -0.7           | 18.8           | 325.5                                      | 1654.8 | 1646.1 |
| D18    | Dodge Ram        | 3047           | 53.3                | 1.3            | 19.1           | 313.1                                      | 1841.9 | 1977.9 |
| D19    | Ford Ranger      | 3020           | 51.2                | -0.6           | 23.5           | 288.8                                      | 1837.1 | 1950.1 |
| G2     | Nissan Pickup    | 3092           | 51.2                | -0.6           | 21.8           | 333.4                                      | 1764.0 | 1895.7 |
| G3     | Dodge Caravan    | 3690           | 48.8                | -0.5           | 22.3           | 581.4                                      | 2435.4 | 2557.2 |
| P1     | Dodge Caravan    | 3596           | 49.0                | -6.6           |                | 508.0                                      | 2264.9 | 2353.2 |
| P2     | Nissan Pickup    | 3070           | 51.2                | -5.0           | 20.7           | 315.8                                      | 1842.0 | 1985.4 |

a. Distance from front axle. b. Distance from center line. c. Center of mass height, measured from the ground.

## TEST RESULTS

Summary data from the tests is presented here to provide general information on the tests. More complete results can be obtained from the films, data tapes and test reports from each test.

### Vehicle Response

In the RTD tests, the vehicles first landed on their side. As the RTD was improved to be more rugged and to provide greater angular motion to the test vehicles, the vehicles tended to land higher up on the side and closer to the roof. Many of the vehicles continued to roll about their

longitudinal axis after this initial impact. A maximum roll of two complete revolutions was obtained in two of the tests. Table 7 lists the general vehicle motion and the major damage to the vehicles. In many of the tests, especially those with pickup trucks, the A-pillar and B-pillar on the impact side collapsed during the first impact with the ground. As the trucks continued to roll, the roof collapsed as it contacted the ground. Most of the pickups slid to a stop on their roof, while some still had enough angular kinetic energy to roll back onto their wheels. The Dodge Caravan in test D8 landed on its side and slid without rolling any further. Although the maximum crush appears to be relatively small, 7.4 inches, the whole van structure was deformed (Figure 9), while in the other van tests only the roof sustained serious damage. Many of the vehicles that came to a rest on their wheels stopped rolling because one or more of the tires blew out, absorbing energy. Other vehicles' suspension systems caused the vehicle to bounce and continue rolling. These results suggest that the primary factor that affected the amount of roll was the energy absorbed in the vehicle deformation.




**Table 7. Vehicle Motion and Damage**

| Test # | Vehicle          | # of 1/4 Rolls | Distance Traveled (ft) <sup>a</sup> |     | Vehicle Damage                       | Maximum Crush (in)  |
|--------|------------------|----------------|-------------------------------------|-----|--------------------------------------|---------------------|
|        |                  |                | X                                   | Y   |                                      |                     |
| D1     | Ford Pinto       | 4              | 29                                  | 3   | Hood bent up                         | -4.2 hood           |
| D2     | Plymouth Reliant | 6              | 25                                  | 11  | Roof crush                           | 3.8 roof            |
| D3     | Honda Accord     | 2              | 25                                  | 11  | Roof crush                           | 3.9 roof            |
| D4     | Chevy Celebrity  | 4              | 84                                  | 12  | Minor                                |                     |
| D5     | Dodge Omni       | 2              | 74                                  | 8   | Roof crush                           | 5.1 roof            |
| D6     | Mercury Zephyr   | 2              | 89                                  | 9   | Roof crush                           | 7.5 roof            |
| D7     | Nissan Pickup    | 6              | 110                                 | 5   | Roof collapse                        | 14.5 roof           |
| D8     | Dodge Caravan    | 1              | 124                                 | 8   | Left side crush                      | 7.4 side            |
| D9     | Chevy Pickup     | 4              | 189                                 | -1  | Roof crush                           | 3.6 roof            |
| D10    | Ford Bronco      | 2              | 136                                 | 5   | Roof & left side crush               | 10.9 roof, 7.5 side |
| D11    | Nissan Pickup    | 2              | 123                                 | 5   | Complete roof collapse               | 13.9 roof           |
| D12    | Dodge Colt       | 2              | 116                                 | -23 | Windshield & right side crush        | 4.1 roof, 5.1 side  |
| D13    | Dodge Caravan    | 8              | 130                                 | -16 | Roof collapse                        | 15.3 roof           |
| D14    | Ford Bronco      | 8              | 105                                 | 10  | Complete roof & right side collapse  | 14.5 roof, 7.4 side |
| D15    | Nissan Pickup    | 4              | 137                                 | 6   | Complete roof collapse               | 14.1 roof           |
| D16    | Nissan Pickup    | 4              | 92                                  | 8   | Complete roof & left side collapse   | 17.2 roof           |
| D17    | Pontiac Grand Am | 2              | 117                                 | 27  | Roof crush                           | 6.8 roof            |
| D18    | Dodge Ram        | 4              | 90                                  | 5   | Complete roof collapse               | 15.6 roof           |
| D19    | Ford Ranger      | 2              | 126                                 | 1   | Complete roof collapse               | 18.5 roof           |
| G1     | Dodge Aries      | 16             | N/A                                 | N/A | N/A                                  | N/A                 |
| G2     | Nissan Pickup    | 4              | 210                                 | -8  | Roof & left side crush               | 11.5 roof           |
| G3     | Dodge Caravan    | 0 <sup>b</sup> | 158                                 | -27 | Minor                                |                     |
| P1     | Dodge Caravan    | 1              | N/a                                 | n/a | Complete left side & roof cave-in    | 25.4 side           |
| P2     | Nissan Pickup    | 2              | N/a                                 | n/a | Roof collapse & left rear wheel lost | 23.2 roof           |

a. Distance measured from knock-out block, which is the point where vehicle release sequence is started.

b. Net number of quarter rolls. Vehicle made one quarter roll followed by a second quarter roll in the opposite direction, ending in an upright position.

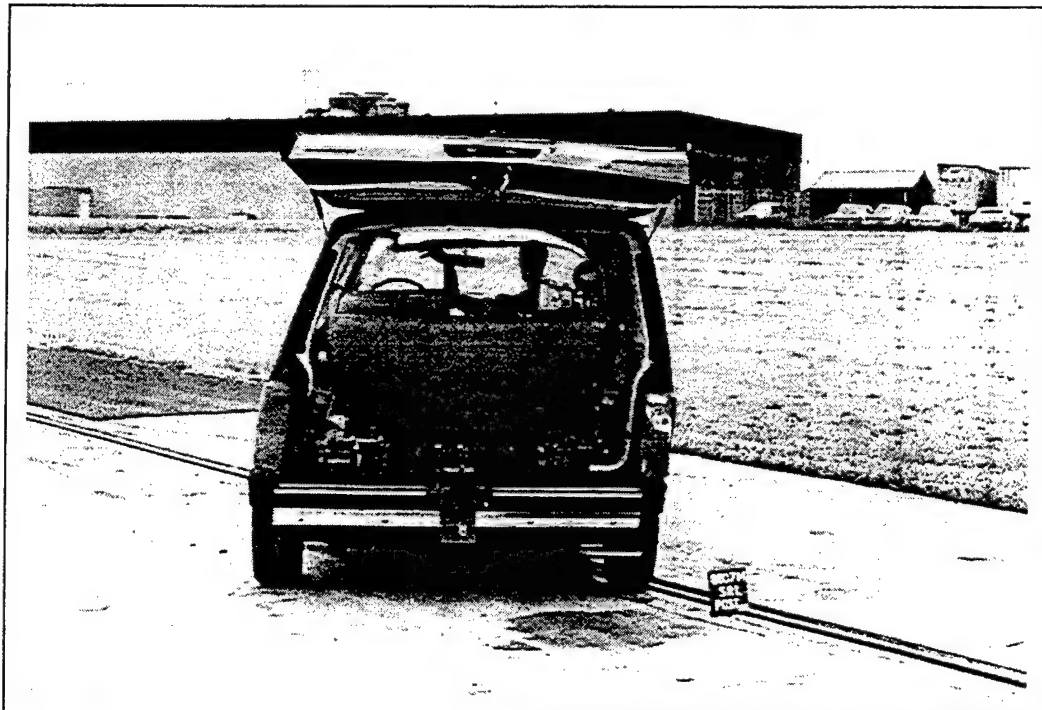


**Figure 9.** Test D8 Dodge Caravan Damage


The Nissan Pickup in the G2 guardrail test rolled onto its right side after impacting the guardrail. It slid on its side and roof on the wet grassy surface, and finally rolled completely over, landing on its wheels and coming to a stop. On the other hand, the Dodge Caravan in the G3 test rolled onto its right side after impacting the guardrail and slid along the guardrail. As it came to the end of the guardrail, the vehicle's right wheels caught the grass or a soft spot in the surface. This yawed the vehicle to the right and then the forward momentum of the vehicle forced the vehicle back onto its wheels. The wet grass in both of these guardrail tests may have resulted in a low coefficient of friction and the minimal rolling.

In setting up the pole impact tests, several trial tests were conducted with previously tested Dodge Caravans. These trial tests were used to determine the curb height and velocity needed to initiate roll of the vehicle, and the distance between the curb and pole required for the vehicle to impact the pole on the driver's side roof. The results of the trial tests varied from the vehicle skipping the curbs and barely rolling before pole impact to the vehicle bouncing up from the curbs, rolling completely to its side and landing on the curb without reaching the pole. In the trial tests, the curb height was increased from 5 to 8 inches to catch the wheel rim, and the curb

material was changed from concrete to steel to avoid curb failure. Also the impact velocity was varied to investigate its effects. The curb in the P1 pole impact test did initiate significant roll and the Caravan impacted the pole after rolling approximately 45°. The driver's side and roof sustained major damage as the vehicle wrapped itself around the pole (Figure 10). The same conditions were used in the P2 pole impact test, but the Nissan Pickup behaved differently. Upon impact with the curb, the truck flew more than six feet into the air and quickly rolled completely upside down. As the vehicle started to come down, the right passenger side hit the pole, causing the pickup to yaw about the pole. The pickup landed upside down on top of its rear wheel, which broke free during the curb impact (Figure 11). The maximum loads on the pole are listed in Table 8. In both tests the impacting wheels suffered major damage, as they were bent at the axle. These results demonstrate the difficulty in predicting the vehicle response in this test configuration and the resulting difficulty in choosing the test conditions. When the curb was not high enough or the velocity was too high, the wheels skipped the curb and no rolling motion occurred. Other conditions caused the wheels to be stopped, transferring all the linear kinetic energy to angular kinetic energy, and the vehicle would fly into the air, rolling rapidly with little forward motion. The ideal vehicle response would have been for the wheels to skip the curb, while slowing down enough for the rest of the vehicle to roll over them, initiating enough rolling motion to tip the vehicle just before impact with the pole.

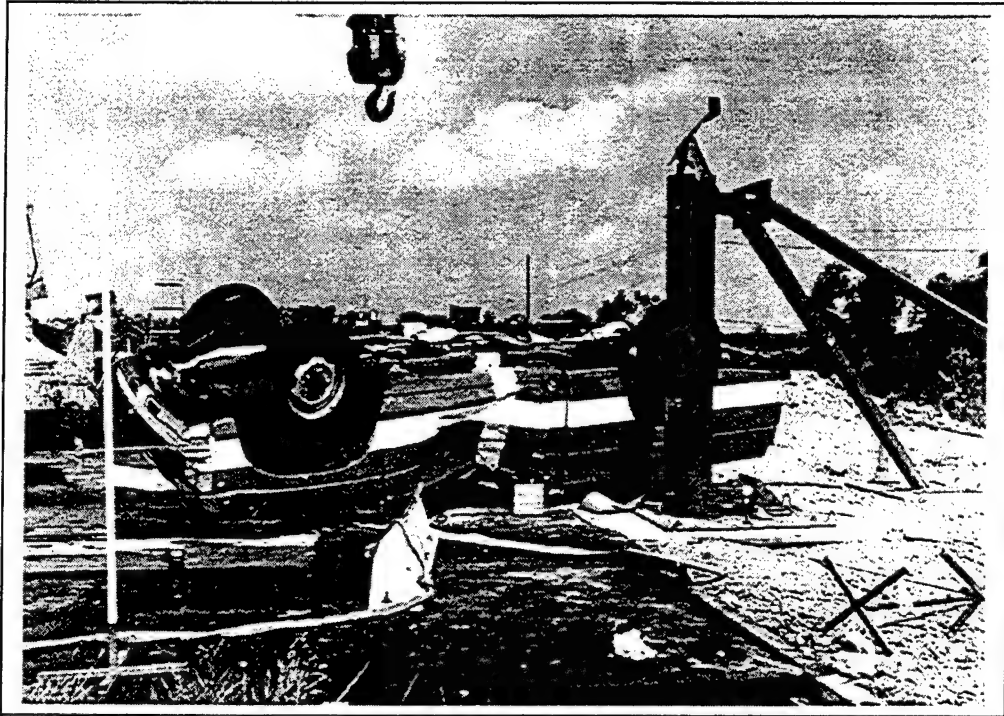

**Figure 10.** Dodge Caravan Pole Impact Test Final Position

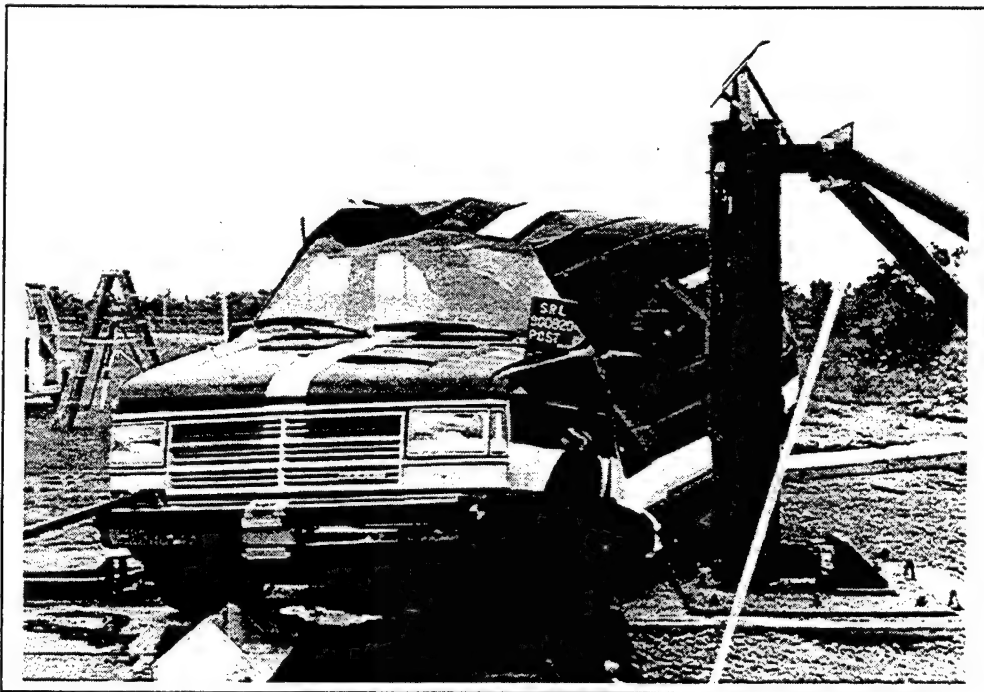

**Figure 11.** Nissan Pickup Pole Impact Test Final Position

**Table 8. Maximum Pole Loads**

| Test # | Vehicle       | Maximum Pole Load (lb) |           |             |              |
|--------|---------------|------------------------|-----------|-------------|--------------|
|        |               | Top Left               | Top Right | Bottom Left | Bottom Right |
| P1     | Dodge Caravan | -5,400                 | -5,800    | -10,100     | -5,300       |
| P2     | Nissan Pickup | -1,900                 | -4,000    | -4,000      | -5,000       |

In general the accelerations experienced by the vehicles in all three types of rollover tests were low compared to accelerations in other types of crashes, such as frontal and side impact. Table 9 lists the maximum accelerations measured at the vehicle center of mass during the rollover tests.

The accelerations experienced in the RTD tests increased in the later tests. This is most likely due to the improvements made to the RTD that increased the rotational energy imparted to the vehicle upon its release. As demonstrated by the vehicle accelerations, the pole impact tests were very severe, while the guardrail impact tests were less severe than the other tests. The maximum vehicle angular velocities in Table 9 are less revealing, varying greatly between tests with little relationship to the number of rolls made by the vehicle.

**Table 9. Vehicle Accelerations and Angular Velocities**

| Test # | Vehicle          | Maximum Center of Mass Acceleration (g) |      |      | Maximum Center of Mass Angular Velocity (deg/sec) |       |       |
|--------|------------------|-----------------------------------------|------|------|---------------------------------------------------|-------|-------|
|        |                  | X                                       | Y    | Z    | X                                                 | Y     | Z     |
| D1     | Ford Pinto       | a                                       | a    | a    | a                                                 | a     | a     |
| D2     | Plymouth Reliant | 9.2                                     | 17.1 | 15.2 | 349.7                                             | 73.0  | 40.3  |
| D3     | Honda Accord     | 8.4                                     | 19.3 | 8.4  | 1152.1                                            | 121.4 | 88.0  |
| D4     | Chevy Celebrity  | 5.6                                     | 62.9 | 13.3 | a                                                 | 108.0 | 73.5  |
| D5     | Dodge Omni       | 5.7                                     | 12.0 | 14.8 | 206.0                                             | 93.5  | 80.6  |
| D6     | Mercury Zephyr   | 3.9                                     | 9.8  | 7.5  | 149.4                                             | 88.5  | 15.5  |
| D7     | Nissan Pickup    | 4.2                                     | 12.9 | 14.1 | 296.9                                             | 203.9 | 125.3 |
| D8     | Dodge Caravan    | 5.5                                     | 10.9 | 11.5 | 276.1                                             | 139.8 | 120.1 |
| D9     | Chevy Pickup     | 10.3                                    | 9.0  | 26.6 | 292.4                                             | 248.5 | 125.2 |
| D10    | Ford Bronco      | 18.4                                    | 11.3 | 13.4 | a                                                 | 137.1 | 64.2  |
| D11    | Nissan Pickup    | 11.0                                    | 12.9 | 17.9 | 408.7                                             | 117.8 | 56.9  |
| D12    | Dodge Colt       | 17.9                                    | 17.8 | 12.9 | 233.9                                             | 344.6 | 275.5 |
| D13    | Dodge Caravan    | 20.6                                    | 28.9 | 20.5 | 319.3                                             | 78.9  | 46.2  |
| D14    | Ford Bronco      | 26.4                                    | 37.9 | 44.9 | 449.4                                             | 159.5 | 98.0  |
| D15    | Nissan Pickup    | 11.6                                    | 14.9 | 20.6 | 380.1                                             | 203.8 | 183.5 |
| D16    | Nissan Pickup    | 27.1                                    | 15.4 | 20.8 | 452.8                                             | 225.2 | a     |
| D17    | Pontiac Grand Am | 9.2                                     | 9.2  | 13.4 | 230.7                                             | 103.1 | 120.2 |
| D18    | Dodge Ram        | 12.6                                    | 36.0 | 24.9 | 623.2                                             | 195.7 | 164.5 |
| D19    | Ford Ranger      | 51.2                                    | 17.7 | 21.4 | 226.4                                             | 50.3  | 81.2  |
| G1     | Dodge Aries      | a                                       | a    | a    | a                                                 | a     | a     |
| G2     | Nissan Pickup    | 7.6                                     | 13.9 | 9.0  | 316.2                                             | 38.0  | 75.2  |
| G3     | Dodge Caravan    | 18.4                                    | 15.4 | 14.8 | 161.9                                             | 46.0  | 154.7 |
| P1     | Dodge Caravan    | 26.7                                    | 54.2 | 30.0 | 690.4                                             | 489.8 | 711.5 |
| P2     | Nissan Pickup    | 11.8                                    | 31.2 | 12.4 | 433.9                                             | 158.5 | 155.1 |

### **Occupant Response**

Because of the varied conditions of the rollover tests that were conducted, the occupant motions were diverse. Although the general occupant responses were varied, the contacts with the vehicle surfaces were somewhat predictable, as shown in Table 10. Head contacts with the roof occurred in virtually all the tests. Door contacts by the chest and the legs were also frequent. In many of the RTD tests the roof collapsed, trapping the dummy head and body and restricting most movement. In two of the unrestrained tests, D9 and D12, the body fell to the opposite side of the vehicle. Because of the number of rolls and lack of roof deformation in the D9 test, the dummy continued to bounce around the truck cab. In the D12 test the roof collapsed, trapping the dummy against the seat. In the remaining tests, the lap belt or steering wheel kept the dummy's body in its seat. Typically in the RTD tests with the dummy positioned on the impact side seat, the roof and side bent in on impact with the ground. The deforming surfaces impacted the dummy head and shoulder, forcing the dummy laterally across the vehicle. The tests with the dummy positioned on the side opposite the initial impact were usually more dramatic. The roof would begin its collapse opposite of the dummy, would continue collapsing in a wave across the vehicle, and eventually trap the dummy head and body against the door. When the last portion of the roof collapsed, the trapped head would be crushed by the roof. At this point the dummy head often provided some roof support, hindering further roof crush. In tests D16 and D19, the head was pushed out the window by this roof movement. The shoulder belts seem to have little effect on the dummy motion. Because of the low vehicle accelerations, the belts did not lock up. The vehicles' rolling motion and the collapse of the roof generally kept the dummy's body upright. The dummy's motion in the P2 test was similar to the RTD tests, but in the P1 test, the dummy and its seat were completely crushed by the pole. The body motions in the guardrail tests were very benign.

**Table 10. Occupant Contacts**

| Test # | Vehicle          | Dummy Contacts               |                   |                          |                      |                         |
|--------|------------------|------------------------------|-------------------|--------------------------|----------------------|-------------------------|
|        |                  | Head                         | Chest             | Left Knee                | Right Knee           | Ejection                |
| D1     | Ford Pinto       | L Door & Camera              | L Door            | L Door                   | Steering Column      | -                       |
| D2     | Plymouth Reliant | Roof & L Side Headliner      | L Door & B-Pillar | L Door                   | Steering Column      | -                       |
| D3a    | Honda Accord     | Roof, R Seat & L Side Header | L Door & Window   | L Door                   | -                    | -                       |
| D4     | Chevy Celebrity  | Roof & L Side Headliner      | L Door & Window   | L Door                   | -                    | -                       |
| D5     | Dodge Omni       | Roof & Header                | Header            | -                        | -                    | -                       |
| D6     | Mercury Zephyr   | L Window, Sill & Seat        | Header            | -                        | -                    | -                       |
| D7     | Nissan Pickup    | Roof & L Side Headliner      | L Door            | -                        | -                    | -                       |
| D8     | Dodge Caravan    | R B-Pillar                   | R Door            | -                        | -                    | -                       |
| D9     | Chevy Pickup     | Seatback & Roof              | -                 | Knee Blocker             | R Door               | -                       |
| D10    | Ford Bronco      | Roof & L Side Headliner      | -                 | Knee Blocker             | R Door               | -                       |
| D11    | Nissan Pickup    | Roof & L Side Headliner      | L Door            | -                        | -                    | L Arm - L Window        |
| D12    | Dodge Colt       | Roof                         | -                 | Instrument Panel         | Passenger Front Seat | -                       |
| D13    | Dodge Caravan    | Roof & B-Pillar              | -                 | -                        | R Door               | R Arm - R Window        |
| D14    | Ford Bronco      | L B-Pillar & Roof            | Roof & China      | L Door                   | -                    | -                       |
| D15    | Nissan Pickup    | Roof                         | Head              | L Door & Steering Wheel  | Steering Wheel       | -                       |
| D16    | Nissan Pickup    | Roof, Window Sill & Ground   | Roof              | L Door & Steering Column | -                    | Head & L Arm - L Window |
| D17    | Pontiac Grand Am | Roof                         | -                 | Steering Wheel & L Door  | Steering Wheel       | -                       |
| D18    | Dodge Ram        | Roof                         | L Door            | L Door                   | Steering Column      | L Hand - L Window       |



**Table 10 (continued). Occupant Contacts**

| Test # | Vehicle       | Dummy Contacts            |                              |           |                 |                 |
|--------|---------------|---------------------------|------------------------------|-----------|-----------------|-----------------|
|        |               | Head                      | Chest                        | Left Knee | Right Knee      | Ejection        |
| D19    | Ford Ranger   | Roof & Ground             | Roof                         | L Door    | Steering Column | Head - L Window |
| G1     | Dodge Aries   | Roof, R Window & Seatback | Driver Seat & R Door         | R Door    | R Door          | -               |
| G2     | Nissan Pickup | Roof                      | -                            | -         | Steering Column | -               |
| G3     | Dodge Caravan | L Window                  | L Door                       | L Door    | Center Console  | -               |
| P1     | Dodge Caravan | L B-Pillar & Roof         | L Door & Passenger Seat Back | L Door    | -               | -               |
| P2     | Nissan Pickup | Roof, L B-Pillar & L Door | L Door                       | L Door    | Steering Wheel  | -               |

Table 11 shows that the resulting head accelerations and Head Injury Criteria (HIC) levels are often low, even though many of the tests were very severe. In only three of the RTD tests and one of the pole impact tests is the HIC level above 1000. The chest accelerations are comparably low. In many cases, when the head and body became trapped, the head was loaded by the roof but it could not move with respect to the body resulting in large neck loads. Therefore, the neck loads may more accurately reflect the severity of the event. The neck forces and torques in 0 show that the HIC levels and head accelerations do not always fully indicate the severity of the occupant's response. For example, the HIC levels in tests D11 and D13 are 156 and 120 respectively, while the neck loads exceeded 1000 lbs. Even more dramatic is test D16 where the HIC level is 774 and the neck experienced forces close to 3000 lbs and torques in excess of 200 in-lbs. (Table 12).

**Table 11. Occupant Head & Chest Accelerations**

| Test # | Vehicle          | HIC  | Maximum Head Acceleration (g) |       |       | Maximum Chest Acceleration (g) |       |       |
|--------|------------------|------|-------------------------------|-------|-------|--------------------------------|-------|-------|
|        |                  |      | X                             | Y     | Z     | X                              | Y     | Z     |
| D1     | Ford Pinto       | a    | a                             | a     | a     | a                              | a     | a     |
| D2     | Plymouth Reliant | 104  | 17.5                          | 98.9  | 32.3  | 15.7                           | 103.0 | 14.2  |
| D3     | Honda Accord     | 132  | 105.3                         | 79.7  | 11.1  | 77.8                           | 26.7  | 15.9  |
| D4     | Chevy Celebrity  | 15   | 9.1                           | 14.8  | 13.5  | 8.3                            | 23.5  | 7.8   |
| D5     | Dodge Omni       | 40   | 11.4                          | 30.7  | 20.9  | 5.6                            | 16.5  | 9.7   |
| D6     | Mercury Zephyr   | 58   | 55.4                          | 14.9  | 18.1  | 8.6                            | 9.1   | 7.1   |
| D7     | Nissan Pickup    | 229  | 15.6                          | 77.2  | 21.0  | 8.3                            | 27.9  | 14.4  |
| D8     | Dodge Caravan    | 18   | 5.9                           | 9.4   | 18.6  | 9.8                            | 11.0  | 14.0  |
| D9     | Chevy Pickup     | 55   | 28.6                          | 41.4  | 21.4  | 13.9                           | 24.9  | 12.5  |
| D10    | Ford Bronco      | 240  | 14.0                          | 77.0  | 34.2  | 57.6                           | 116.3 | a     |
| D11    | Nissan Pickup    | 156  | 24.3                          | 50.1  | 31.3  | 13.5                           | 15.0  | 18.0  |
| D12    | Dodge Colt       | 81   | 18.9                          | 44.3  | 119.6 | 7.8                            | 11.2  | 15.9  |
| D13    | Dodge Caravan    | 220  | 12.2                          | 89.7  | 27.0  | 8.0                            | 5.5   | 19.8  |
| D14    | Ford Bronco      | 2140 | 24.7                          | 63.2  | 399.7 | 33.6                           | 29.9  | 77.3  |
| D15    | Nissan Pickup    | 1049 | 81.2                          | 58.1  | 142.5 | 35.4                           | 25.1  | 90.3  |
| D16    | Nissan Pickup    | 774  | 34.9                          | 110.9 | 147.8 | 22.8                           | 21.7  | 77.9  |
| D17    | Pontiac Grand Am | 89   | 12.8                          | a     | a     | 14.5                           | 6.6   | 30.9  |
| D18    | Dodge Ram        | 3015 | 174.6                         | 86.6  | 250.2 | 58.9                           | 24.7  | 313.4 |
| D19    | Ford Ranger      | 938  | 175.9                         | 246.9 | 122.3 | 28.1                           | 45.5  | 51.6  |
| G1     | Dodge Aries      | a    | a                             | a     | a     | a                              | a     | a     |
| G2     | Nissan Pickup    | 42   | 11.9                          | 20.4  | 44.3  | 11.9                           | 11.2  | 21.7  |
| G3     | Dodge Caravan    | 154  | 23.3                          | 46.1  | 30.3  | 9.3                            | 21.9  | 18.7  |
| P1     | Dodge Caravan    | 1328 | 230.7                         | 190.9 | 163.4 | 72.0                           | 99.6  | 57.5  |
| P2     | Nissan Pickup    | 426  | 24.5                          | 71.5  | 48.9  | 25.5                           | 52.9  | 15.1  |

a. Data unavailable

**Table 12. Neck Loads**

| Test # | Vehicle          | Maximum Neck Force (lb) |        |         | Maximum Neck Moment (in lb) |        |       |
|--------|------------------|-------------------------|--------|---------|-----------------------------|--------|-------|
|        |                  | X                       | Y      | Z       | X                           | Y      | Z     |
| D1     | Ford Pinto       | C                       | c      | c       | c                           | c      | c     |
| D2     | Plymouth Reliant | C                       | c      | c       | c                           | c      | c     |
| D3     | Honda Accord     | C                       | c      | c       | c                           | c      | c     |
| D4     | Chevy Celebrity  | 104.4                   | d      | 552.3   | d                           | 18.1   | d     |
| D5     | Dodge Omni       | 118.1                   | d      | 754.8   | d                           | 28.7   | d     |
| D6     | Mercury Zephyr   | 171                     | d      | 492.9   | d                           | 42.4   | d     |
| D7     | Nissan Pickup    | 63                      | 134.8  | 243.9   | 325.6                       | 260.9  | 168.4 |
| D8     | Dodge Caravan    | 22.5                    | 72     | 155.4   | 133.4                       | 122.6  | 55.5  |
| D9     | Chevy Pickup     | 81.6                    | 131.4  | 591.1   | 25.8                        | 35.6   | 15.2  |
| D10    | Ford Bronco      | 45                      | 204.8  | 263.1   | 80.4                        | 19.5   | 8.5   |
| D11    | Nissan Pickup    | 362.5                   | 244.6  | 1156.8  | 104.5                       | 45.1   | 32    |
| D12    | Dodge Colt       | 153.5                   | 209.9  | 787.9   | 44.4                        | 22.4   | 32.3  |
| D13    | Dodge Caravan    | 120.2                   | 246.9  | 1031.7  | 95.2                        | 27.1   | 12.7  |
| D14    | Ford Bronco      | 283.9                   | 655.2  | 2152.7b | 222.6                       | 69.7   | 57    |
| D15    | Nissan Pickup    | 1330.2                  | 803.7  | 2116.6b | 173.8                       | 229.8  | 69.5  |
| D16    | Nissan Pickup    | 1174.2                  | 1197.8 | 2960.2b | 234.9                       | 79.6   | 63.5  |
| D17    | Pontiac Grand Am | 152.9                   | 154.6  | a       | 65.1                        | 29.1   | 19.7  |
| D18    | Dodge Ram        | 2421.3                  | 667.8  | 2644.6b | 158.8                       | 357.8b | 64.6  |
| D19    | Ford Ranger      | 3054.5                  | 716.1  | 2807.5  | 280.1                       | 252.8  | 79.5  |
| G1     | Dodge Aries      | C                       | c      | c       | c                           | c      | c     |
| G2     | Nissan Pickup    | 283.3                   | 242.3  | 942.2   | 26.1                        | 20.1   | 6.6   |
| G3     | Dodge Caravan    | 82.4                    | 113.8  | 259.9   | 26.9                        | 14.9   | 15.3  |
| P1     | Dodge Caravan    | 2098.8                  | 2889.1 | 2128.5  | 77.4                        | 20.1   | 11.5  |
| P2     | Nissan Pickup    | 149.5                   | 222.9  | 946.8   | 39.2                        | 26.1   | 15    |

a. Data unavailable

b. Exceeded channel's full scale

c. The Part 572 dummy used does not have a neck load cell.

d. Neck load cell measured limited axes in early Hybrid III dummy.

## CONCLUSIONS

These tests were conducted to develop consistent rollover testing methodologies, identify procedural and vehicle structural problems and provide information on occupant dynamics during automobile rollover accidents for use in validating computer simulations. Because the twenty-four tests were conducted under several different programs over a period of more than six years, they do not make up a complete study in which statistical comparisons can be made between and among tests. They do provide a large amount of data on rollover, along with insights into what can happen during rollover and what factors need to be considered when developing rollover tests.

In the tests conducted it was found that the vehicle rollover motion is very unpredictable, due to its sensitivity to many factors. These factors include the vehicle mass properties, the initial conditions, the point of first impact, the ground surface properties, the deformation characteristics of each vehicle component that impacts the ground, and failure of any vehicle components such as tire blow out or roof collapse. In the two tests with the same test conditions, D15 and D16, the results were similar in some respects, such as the amount of roll and the type of roof crush, but other results were considerably different, such as the distance traveled and the vehicle accelerations. The dummy responses showed even more differences. This partially demonstrates the difficulty in developing a standard highly repeatable rollover test.

With the upgrades that were made to it during the span of these tests, the RTD easily handles the vehicles used and imparts enough angular velocity to the vehicles to ensure some rolling motion. Although the realism of these tests may be questionable, the RTD provides a somewhat controllable method of initiating roll and linear velocity, with conditions that are not unreasonable. The guardrail impact tests are more plausible events, but rollover is not always assured, as demonstrated in test G3. For future tests using the guardrail, it is recommended that the grass surface be compacted and leveled, to provide more consistent test conditions. The pole impact tests were highly unpredictable and need to be completely redesigned. The suspension system dynamics during the contact with the curbs depend on many factors that are difficult to determine or model. This and the precision required in selecting the test conditions make the tests extremely difficult to control.

The occupant motions showed that, although the lap belt probably restrained the dummy in its

seat, the shoulder belt rarely affected the dummy's motion. Unless a rollover includes accelerations of the proper magnitudes and directions to lock the shoulder belt mechanisms, the shoulder belt will provide minimum restraint.

Most of the tests resulted in significant roof crush. The pickup trucks especially showed a tendency for the cab roof to completely collapse, with the seat back, window sill, or even dummy head limiting further deformation. Often the body was trapped by the roof crush. In these cases the head/neck system was vulnerable to large loads from the roof. These loads did not always result in high head accelerations; therefore, it is important that neck loads be measured in rollover testing.

These tests provided greatly needed data on vehicle and occupant dynamics during automobile rollover from three different testing procedures. They demonstrated the variability of rollover results, the difficulty in controlling the test conditions, the tendency for significant roof crush, and the danger to the head and neck region of the body. They also raised many other questions, suggesting that future comprehensive testing and simulation studies are needed.

## REFERENCES

1. Kaleps, I., Obergefell, L.A. and Ryerson, J.R., "Simulation of Restrained Occupant Dynamics During Vehicle Rollover," DOT Report No. HS-807-049, June 1986.
2. Obergefell, L.A., Rizer, A.L. and Kaleps, I., "Simulations of Rollover tests, " DOT Report No. HS-807-372, May 1988.
3. Rizer, A.L., Obergefell, L.A., and Kaleps, I., "Simulations of Vehicle Dynamics During Rollover," DOT Report No. HS-807-587, May 1989.
4. Segal, D. and Kamholz, L., "Developments of a General Rollover Test Device," DOT Report No. HS-806-550, September 1983.
5. Stultz, John C., "Modifications to the NHTSA General Purpose Rollover Test Device," Transportation Research Center of Ohio, January 1989.

## APPENDIX A

### DATA FILTERING IN TRC TESTS

In all the rollover tests conducted at TRC, the data were filtered using a 1650 Hz analog filter, then digitally sampled at 1000 samples/second. This sampling rate was chosen to accommodate the relatively long time span of the rollover tests. The filtering method is questionable, because the sampling rate is lower than the filtering frequency. To investigate the validity of the data filtered using this method, three methods of filtering were used by TRC with the data from a representative rollover test, the 16 November 1989, Nissan Pick-Up Truck Rollover (D15):

- A. 1650 Hz analog filter, 1000 samples/second
- B. 1650 Hz analog filter, 8000 samples/second
- C. 300 Hz analog filter, 1500 samples/second

Method A is the process used in all of the TRC rollover tests described in this test report. Method B is the SAE J211 standard for impact tests. Because of the high sampling rate required, this method cannot be used with TRC's data collection system over the time span of the rollover tests. Therefore, only the data within the interval of 1.2 to 2.2 seconds was analyzed using Method B. Method C is an alternative method that has a good sampling-rate-to-filtering frequency ratio and will allow data to be collected over the entire rollover event.

The HIC values for this test using each of the three filtering methods are listed in Table A-1. Method B data have a time shift of approximately 0.015 seconds relative to the other two sets of data that is not due to the filtering methods. This can be seen in the HIC time intervals. This comes from the difficulty in precisely indexing the analog tape to a point other than zero time for the start of the data analyzed using Method B. It should also be noted that each of the three sets of digital data was read independently by TRC from the analog tape. Thus, the Method A data do not constitute a subset of the Method B data.

**Table A-1. HIC Values For Test D15**

| <b>Filtering Method</b> | <b>HIC</b> | <b>Time Interval (seconds)</b> |
|-------------------------|------------|--------------------------------|
| A                       | 1049.3     | 1.369 - 1.388                  |
| B                       | 1026       | 1.384 - 1.402                  |
| C                       | 1000       | 1.370 - 1.389                  |

After taking into account these differences, two types of analysis were used to compare the three sets of data. First, the plots of all three sets of data were compared visually and the numerical values of minima and maxima were compared. The second type of analysis was used on several selected channels from all three data sets. The signal was integrated and the results of two successive integrations on corresponding channels were compared. Irrelevant spikes in the data would have no effect on the integrated curves, while meaningful spikes would change the shape of the integrated curves. Comparison of the integrated curves obtained from the different filtering methods showed no significant differences.

Overall, all three data sets compare very well. The Method C data curves are a little smoother, with less signal noise, than the Method B data curves, as expected. No significant signal information appears to be lost by analog filtering at 300 Hz. In visually analyzing very noisy signals, for instance the vehicle center of gravity accelerations, the 300 Hz filtered data actually represents the meaningful signal shape better.

Method C has also been used to filter the data from five other tests (D16, D18, D19, P1, and P2) in which the analog tapes were still available. HIC values for these tests, using filtering Method C and the original Method A, are listed in Table A-2. Again, there is a time shift of approximately 0.023 seconds in the P1 test data, as can be seen in the HIC time interval. In general, all five sets of data filtered by Method C compare well with the data filtered by Method A.



**Table A-2. HIC Values Using Filtering Methods**

| Test # | Method C |                     | Method A |                     |
|--------|----------|---------------------|----------|---------------------|
|        | HIC      | Time Interval (sec) | HIC      | Time Interval (sec) |
| D16    | 676      | 1.349 - 1.361       | 774.3    | 1.348 - 1.360       |
| D18    | 3144     | 0.989 - 0.995       | 3014.8   | 0.987 - 0.992       |
| D19    | 872      | 1.451 - 1.476       | 937.5    | 1.451 - 1.476       |
| P1     | 1331     | 0.269 - 0.272       | 1328.3   | 0.292 - 0.294       |
| P2     | 425      | 0.119 - 0.147       | 425.5    | 0.119 - 0.147       |

Based on the results of these comparisons, the Method A filtered data from all the rollover tests reasonably characterize the rollover results. Also, Method C appears to be an acceptable alternative for filtering the data for rollover tests with the limitations of TRC's data collection system. It uses a proper sampling-rate-to-filtering frequency ratio, allows data to be collected over the entire rollover test event, and provides signal information from rollover tests comparable to that for the standard Method B.